



Catalog **Grupo Sarlo**



Only true passion can stand the test of time and overcome every obstacle.



Grupo Sarlo began operating in 1986 and, thanks to the high quality and safety of its products, became a market leader.

With nearly 40 years of innovation and technology, Sarlo was one of the pioneers in manufacturing products for aquariums and ornamental ponds in Brazil.

Our extensive experience and ongoing investment in product research and development translate into smart, effective, durable and more energy-efficient solutions.

Today, our diverse product line meets a wide range of needs for aquariums and pond construction and maintenance. We also offer pumps for hydroponics, pet drinking fountains, evaporative coolers and decorative fountains.

We are happy to share our passion for what we do and contribute to our country's economy. Wherever there is Sarlo, there is dedication, creativity and innovation, pride in being Brazilian, quality and respect for the environment. Wherever there is Sarlo, there is life.

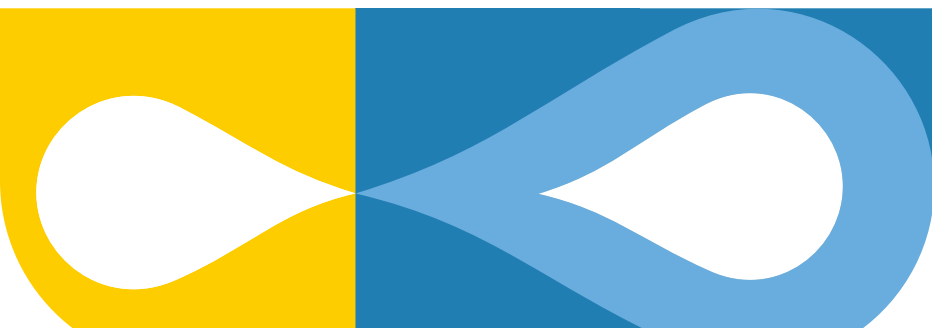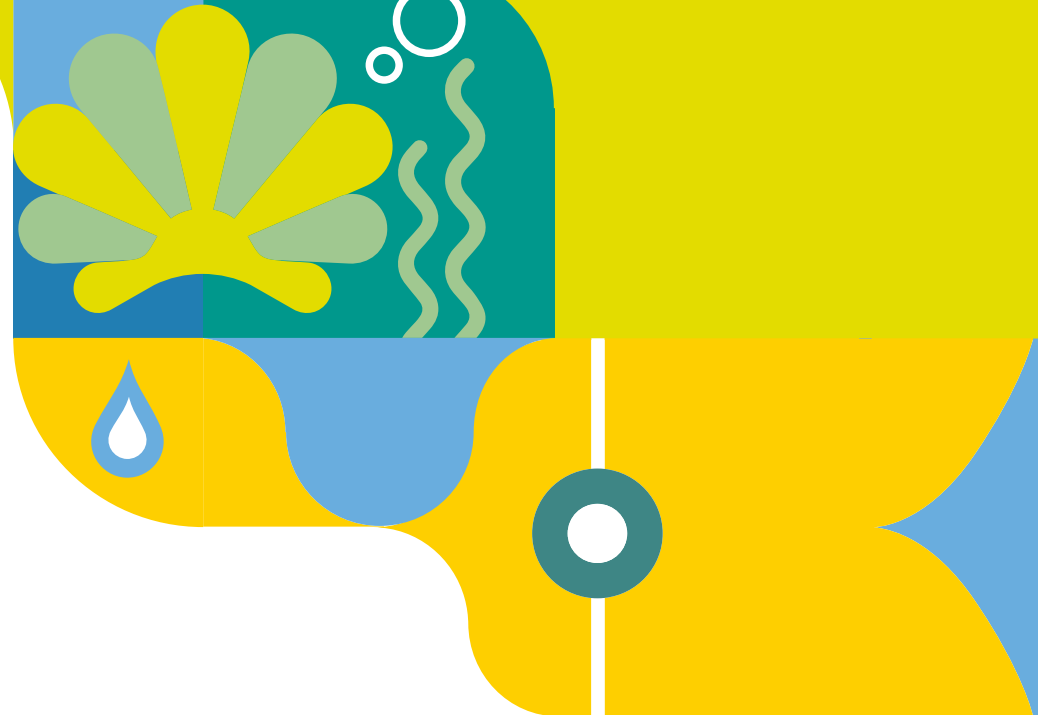

Contents

Sarlo Better



SF Series 06

SB Series 08

Mini Series 10

Technical specifications 12



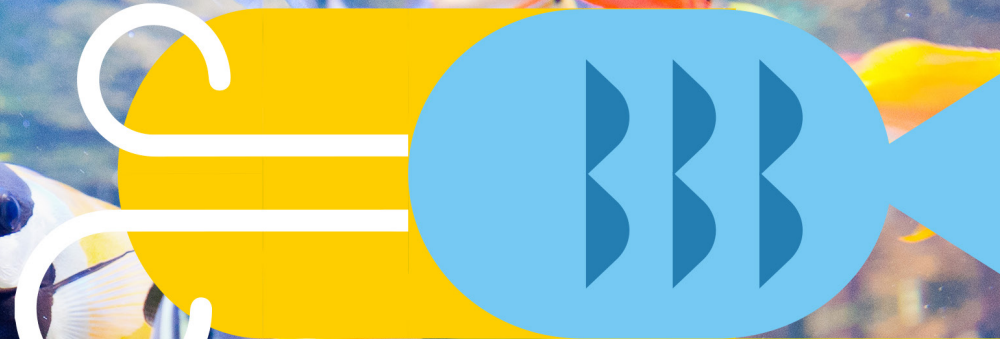

Sarlo Better.

In Brazilian aquariums
since 1986.



SarloBetter

SF Series

Great versatility for aquariums of different sizes.

Efficient, quiet hang-on-back filters with adjustable flow and very low energy consumption. High-capacity chemical, mechanical and biological filtration, with adjustable bottom and surface intakes.



Low
power
consumption

FEATURES

- Reusable holder for filter pad and carbon.
- Filter pad for mechanical filtration.
- High-capacity basket for chemical or biological filter media.
- Flow control.
- Floating surface skimmer with flow adjustment.
- Height-adjustable bottom intake with a wide water inlet.
- Smart flow deflector: improves oxygenation and distributes return water throughout the aquarium, regardless of the flow setting.
- Lid with ventilation slots.
- All parts are made of high-strength plastic.
- Self-priming Sarlo Better pump with low energy consumption and long service life.

Great versatility for small aquariums.

SF filters are designed for freshwater or saltwater aquariums and provide complete mechanical, chemical and biological filtration. They feature an exclusive surface skimmer and a smart flow deflector for improved oxygenation and water flow distribution. Flow control allows precise adjustments for different aquarium types and the species they house. They use little electricity, and their electrical components are fully encapsulated in epoxy resin to protect against electric shock.

SF Series / Great versatility for aquariums of different sizes.



SF 15-75

Waterproof insulation (IPX8)

Adjustable flow up to 300 L/h

Aquariums from 15 to 75 liters

Power 2W



SF 25-115

Waterproof insulation (IPX8)

Adjustable flow up to 490 L/h

Aquariums from 25 to 115 liters

Power 3.4W



SB Series


The aquarium powerhouse.

Powerful, quiet and efficient pumps that create strong water movement with low energy consumption. These are Sarlo Better's most powerful pumps and feature suction-cup mounting.



Low
power
consumption

PERFORMANCE CURVE

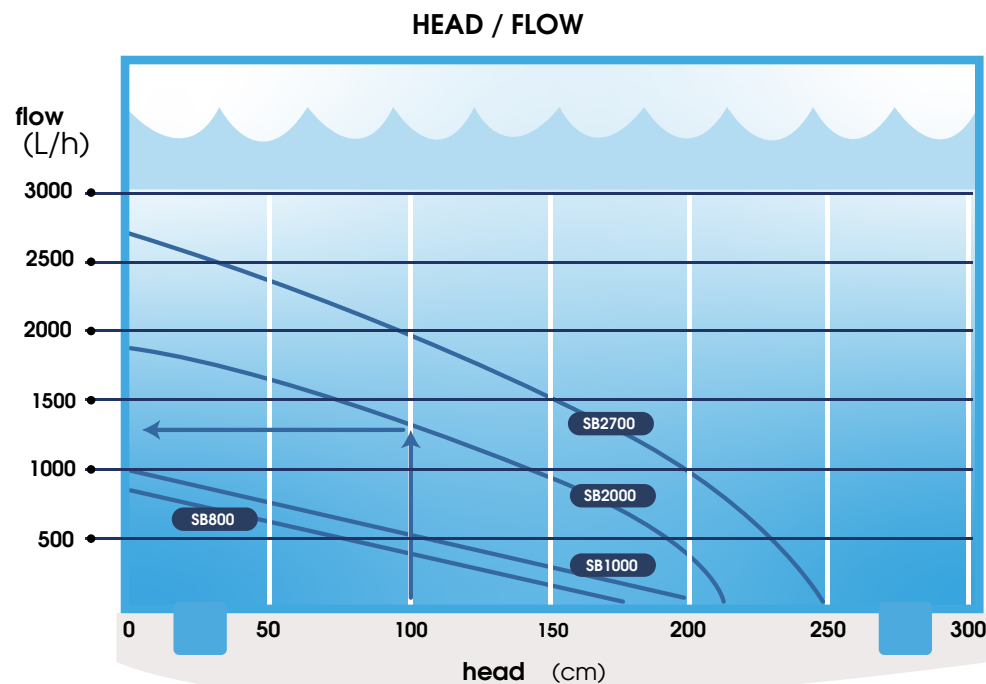

The aquarium powerhouse.

SB Series pumps are designed for evaporative coolers, return systems, skimmers, freshwater and saltwater aquarium circulation, fountains and small ornamental ponds.

SB Series / The aquarium powerhouse.



SB 2000

Waterproof insulation (IPX8)

Flow rate 1950 L/h

Water head 2.1 m

Power 30 W

SB 2700

Waterproof insulation (IPX8)

Flow rate 2740 L/h

Water head 2.45 m

Power 45 W



SB 1000A

Waterproof insulation (IPX8)

Flow rate 400-1000 L/h

Water head 2.0 m

Power 15 W

SB 1000C

Waterproof insulation (IPX8)

Flow rate 400-1000 L/h

Water head 2.0 m

Power 15 W



SB 800A

Waterproof insulation (IPX8)

Flow rate 300-800 L/h

Water head 1.7 m

Power 12 W

SB 800C

Waterproof insulation (IPX8)

Flow rate 300-800 L/h

Water head 1.7 m

Power 12 W

Mini Series


Small but extraordinary.

The Mini Series includes the smallest pumps made by Sarlo Better. Their exclusive design makes them highly versatile and compact. They feature flow control and suction-cup mounting.



Low
power
consumption

PERFORMANCE CURVE

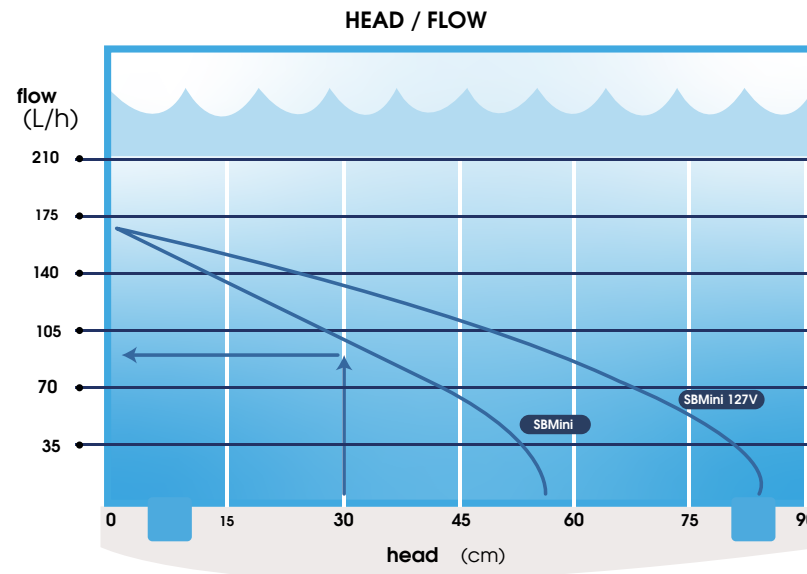

Mini A and C

Featuring flow control and suction-cup mounting, Mini Series pumps are designed for freshwater or saltwater aquariums, either as circulation pumps or connected to an undergravel biological filter. They can also be used in small fountains and animal drinking fountains.

Mini F

The Mini F filter is specially designed to provide circulation and mechanical, biological and chemical filtration in aquatic terrariums and small freshwater or saltwater aquariums.

Mini Series / Small but extraordinary.



Mini A

Waterproof insulation (IPX8)

Flow rate 60 - 170 L/h

Water head 55 cm

Power 2 W

Mini C

Waterproof insulation (IPX8)

Flow rate 60 - 170 L/h

Water head 55 cm

Power 2 W



Mini F

Waterproof insulation (IPX8)

Flow rate 60 - 170 L/h

Water head 55 cm

Power 2 W



SF SERIES

Code	Product	Voltage (V)	Min. flow (L/H)	Max. flow (L/H)	Max. head (m)	Power (W)	Dimensions L x W x H (cm)	Weight (g)	Cord length (m)	Warranty	Outlet diameter	Inlet diameter	Operates out of water
11010005	SF15-75	127		300 L/h		2 W	12,4 x 12,2 x 15,4		1.2 m	2 years			
11020005	SF15-75	220		300 L/h		2 W	12,4 x 12,2 x 15,4		1.2 m	2 years			
11010006	SF25-115	127		490 L/h		3,4 W	16,2 x 12,2 x 15,6		1.2 m	2 years			
11020006	SF25-115	220		490 L/h		3,4 W	16,2 x 12,2 x 15,6		1.2 m	2 years			


SB SERIES

Code	Product	Voltage (V)	Min. flow (L/H)	Max. flow (L/H)	Max. head (m)	Power (W)	Dimensions L x W x H (cm)	Weight (g)	Cord length (m)	Warranty	Outlet diameter	Inlet diameter	Operates out of water
03010019	SB800A	127	300 L/h	800 L/h	1.7 m	12 W	7,9 x 5 x 7,3	290	1.4 m	2 years	12.6 mm	24.7mm	No
03020019	SB800A	220	300 L/h	800 L/h	1.7 m	12 W	7,9 x 5 x 7,3	300	1.4 m	2 years	12.6 mm	24.7mm	No
03010020	SB800C	127	300 L/h	800 L/h	1.7 m	12 W	7,9 x 5 x 7,3	290	1.4 m	2 years	12.6 mm		No
03020020	SB800C	220	300 L/h	800 L/h	1.7 m	12 W	7,9 x 5 x 7,3	300	1.4 m	2 years	12.6 mm		No
03010001	SB1000 A	127	400 L/h	1000 L/h	2.0 m	15 W	7,9 x 5 x 7,3	290	1.4 m	2 years	12.6 mm	24.7mm	No
03020001	SB1000 A	220	400 L/h	1000 L/h	2.0 m	15 W	7,9 x 5 x 7,3	300	1.4 m	2 years	12.6 mm	24.7mm	No
03010002	SB1000 C	127	400 L/h	1000 L/h	2.0 m	15 W	7,9 x 5 x 6,9	290	1.4 m	2 years	12.6 mm		No
03020002	SB1000 C	220	400 L/h	1000 L/h	2.0 m	15 W	7,9 x 5 x 6,9	300	1.4 m	2 years	12.6 mm		No
04010001	SB2000	127		1950 L/h	2.1 m	30 W	10 x 7.5 x 11	830	2 m	2 years	20 mm	24.7mm	No
04020001	SB2000	220		1950 L/h	2.1 m	30 W	10 x 7.5 x 11	830	2 m	2 years	20 mm	24.7mm	No
04010011	SB2700	127		2740 L/h	2.45 m	45 W	10 x 7.5 x 11	820	2 m	2 years	20 mm	24.7mm	No
04020011	SB2700	220		2740 L/h	2.45 m	45 W	10 x 7.5 x 11	830	2 m	2 years	20 mm	24.7mm	No

MINI SERIES													
Code	Product	Voltage (V)	Min. flow (L/H)	Max. flow (L/H)	Max. head (m)	Power (W)	Dimensions L x W x H (cm)	Weight (g)	Cord length (m)	Warranty	Outlet diameter	Inlet diameter	Operates out of water
05010001	Mini A	127	60 L/h	170 L/h	0.55 m	2 W	4.1 x 3.7 x 5.2	140	1 m	2 years	8.6 mm	24.7mm	No
05010001	Mini A	220	60 L/h	170 L/h	0.55 m	2 W	4.1 x 3.7 x 5.2	140	1 m	2 years	8.6 mm	24.7mm	No
05010002	Mini C	127	60 L/h	170 L/h	0.55 m	2 W	4.1 x 3.7 x 4.5	140	1 m	2 years	8.6 mm		No
05010002	Mini C	220	60 L/h	170 L/h	0.55 m	2 W	4.1 x 3.7 x 4.5	140	1 m	2 years	8.6 mm		No
11010001	Mini F	127	60 L/h	170 L/h	0.55 m	2 W	6.7 x 6.2 x 15	230	1 m	2 years	8.6 mm		No
11010001	Mini F	220	60 L/h	170 L/h	0.55 m	2 W	6.7 x 6.2 x 15t	240	1 m	2 years	8.6 mm		No

NOTES:

- All models are available without packaging or accessories (for industrial use).
- SB2000, SB2700 and SB1000 models are also available with thermal protection.

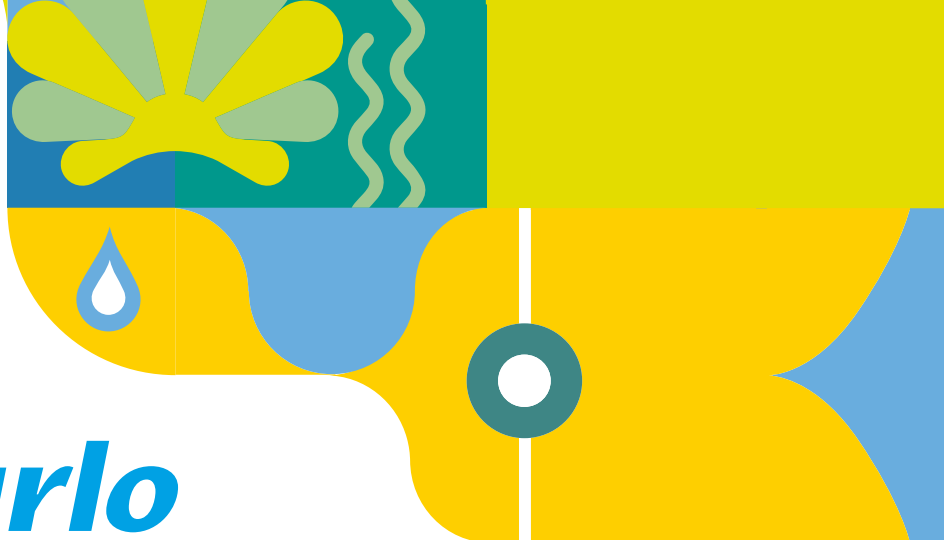

Grupo Sarlo

Wherever there is Sarlo, there is life!



11 4220-2011

Al. São Caetano do Sul, 2315 – Santa Maria

09560-500 – São Caetano do Sul/SP

sac@sarlobetter.com.br

www.gruposarlo.com.br



UPDATED MAY 2026

